


REV. DATE	MODIFICATION	APPROVER
08.09.20 NEW		Vicky

- Remarks:
- Material:
 - Housings: LCP UL94V-0
 - Terminal: Phosphor bronze, nickle ground 50", Gold 1u" on contact area plating
 - Shell: SUS, nickle ground 50", Gold 1u" at solder tail
 - Main Performance:
 - Rated current: 0.5A
 - Contact resistance: 50mΩ MAX
 - Insulation resistance: 100MΩ MIN 100V DC
 - Withstanding voltage test: 100V AC
 - Solderability: temperature 235±5°C, time 5±0.5s
 - Terminal retention force: 0.035kgf MIN
 - Life cycle: 5000times
 - Withstanding temperature: oven test: temperature 250±5°C, 2 minutes
 - Operating environment: temperature: -30°C~+80°C; humidity: 80% MAX

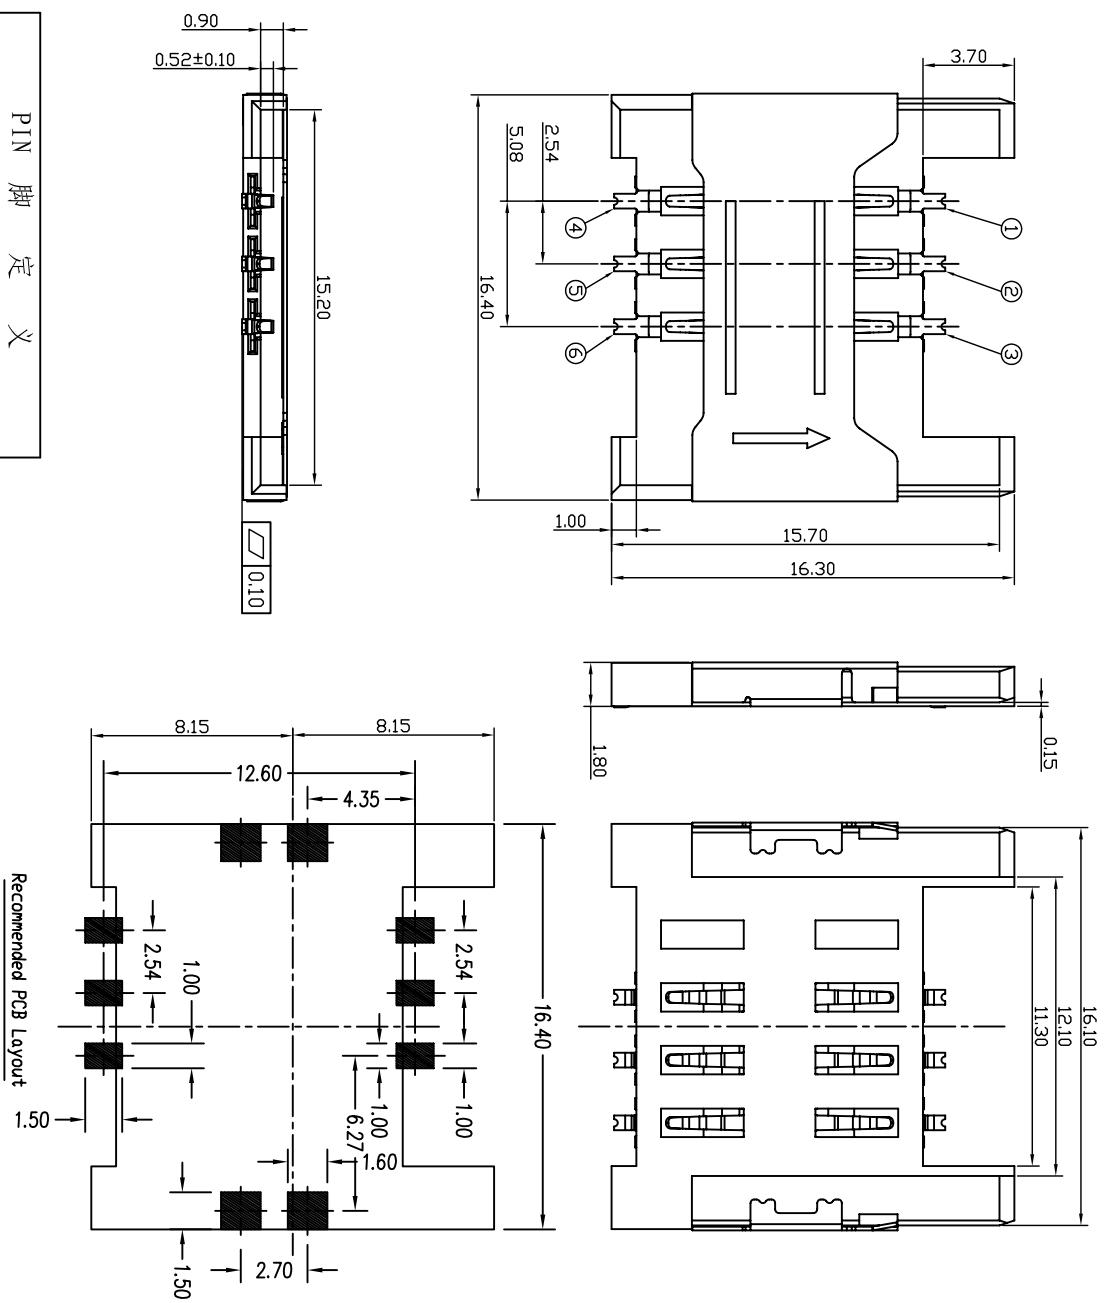

PIN 脚 定 义					
第1PIN	第2PIN	第3PIN	第4PIN	第5PIN	第6PIN
VCC	RESET	CLK	GND	VPP	I/O

GENERAL TOLERANCE		UNITS mm		NAME		ATOM TECHNOLOGY CO., LTD.	
SELECT	TOL	1	2	3	PART NO:	TITLE: SIM CARD 2.54mm 6P H=1.8mm 带红	
DN	XXX	±0.05/0.05/0.15	±0.05/0.05/0.15	±0.05/0.05/0.15	APPD:	DWG NO. SIM	
FINISH	XXX	±0.15/0.13/0.25	±0.25/0.25/0.5	±0.38/1.00	CHKD:	SCALE SHEET REV	
Q'TY	X	±	±	±	DR:	1:1 1 OF 1 A	
ANGLE	±1°				Ocean		