



# CBB21 (MPP)

## 金屬化聚丙烯膜電容器 METALLIZED POLYPROPYLENE FILM CAPACITOR

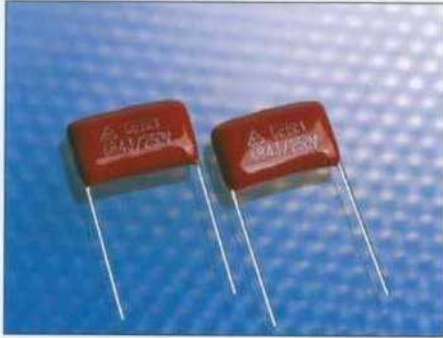

外形圖 Outline Drawing

CBB21 為無感結構,用金屬化聚丙烯薄膜作為電介質/電極繞制而成,導線採用鍍錫鋼包銅線,使用環氧樹脂包封。

CBB21 are non-inductively wound with metallized polypropylene film as the dielectric/electrode with copper-clad steel leads and epoxy resin coating

### 特點 FEATURES

- 高頻損耗小,適用於較大電流
- 絕緣電阻高,自愈性好,壽命長
- 廣泛用於高頻、直流、交流和脈衝電路中
- Very low loss at high frequency, suitable for high current
- High insulation resistance, long life due to self-healing effect
- Widely used in high frequency, DC, AC and pulse circuits



### 技術要求 SPECIFICATIONS

引用標準 Reference Standard	GB10190 (IEC 60384-16)		
氣候類別 Climatic Category	40/85/21		
額定電壓 Rated Voltage	100V/160V - 250V - 400V - 630V		
電容量範圍 Capacitance Range	0.0047~3.3 $\mu$ F		
電容量偏差 Capacitance Tolerance	$\pm 5\%$ (J), $\pm 10\%$ (K), $\pm 20\%$ (M)		
耐電壓 Voltage Proof	1.5U <sub>n</sub> (5s)		
損耗角正切 Dissipation Factor	$\leq 0.1\%$ (20°C, 1kHz)		
絕緣電阻 Insulation Resistance	$\geq 25000M\Omega$	CR $\leq 0.33 \mu$ F	(20°C, 1min)
	$\geq 7500s$	CR $> 0.33 \mu$ F	