

NOTE:

1. MATERIAL:

a. HOUSING: PA66 GLASS FIBRE UL94 V-0

b. CONTACT: BRASS

(SURFACE PLATING: Sn100u" + Ni50u")


2. ELECTRIC:

a. CONTACT RESISTANCE: 30 MILLIOHMS MAX

b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN

c. DIELECTRIC VOLTAGE: 500V AC ONE SEC LEVEL

d. OPERATING TEMPERATURE: -55° C - 105° C

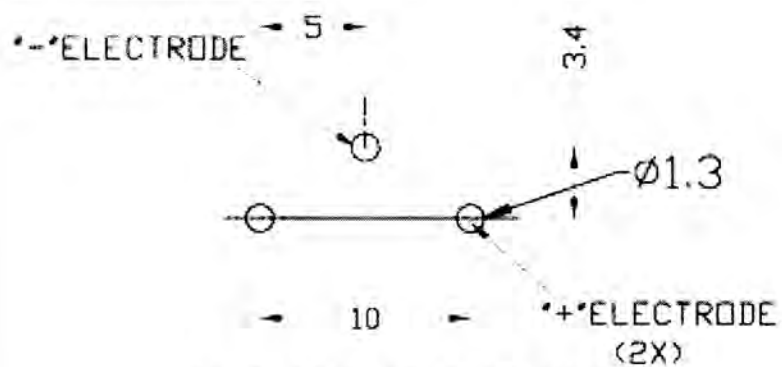

PCB HOLE LAYOUT