



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/17/05'		LJC 05/17/05'
B	统一尺寸规格	LL 11/16/06'		LJC 11/16/06'
C	增加尺寸选项	YCH 07/27/10'		

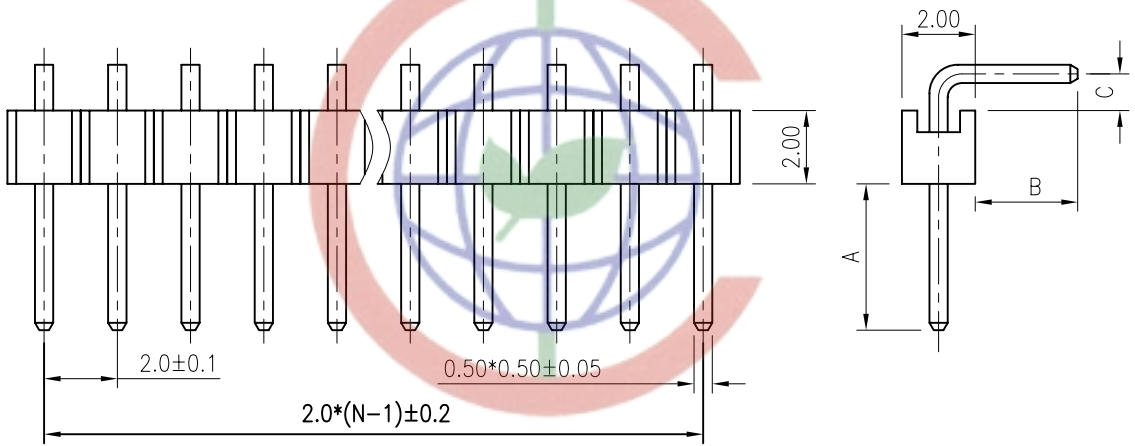

- NOTES:
- MATERIAL&FINISHES
    - INSULATOR:THERMOPLASTIC(UL 94V-0).
    - CONTACT MATERIAL: COPPER ALLOY.
  - SPECIFICATION
    - CURRENT RATING:1.5 Amp.
    - INSULATION RESISTANCE:1000MΩ Min.
    - DIELECTRIC WITHSTANDING:600VAC.
    - CONTACT RESISTANCE:20mΩMax.
    - OPERATING TEMPERATURE:-20°C TO +80°C.


3. PRODUCT NUMBER CODE:
- DS1025-02 - X X X X X - X
- Dim. A B C type
  - 1: Type 1
  - 5: Type 5
  - .....
  - CONTACTS TYPE
  - R:RIGHT ANGLE TYPE
  - HOUSING COLOR
  - B:BLACK
  - CONTACT PLATING
  - 8:FULL GOLD FLASH
  - CONNECTOR TYPE
  - P:PLUG
  - No.OF CONTACTS
  - 1\*2-1\*X

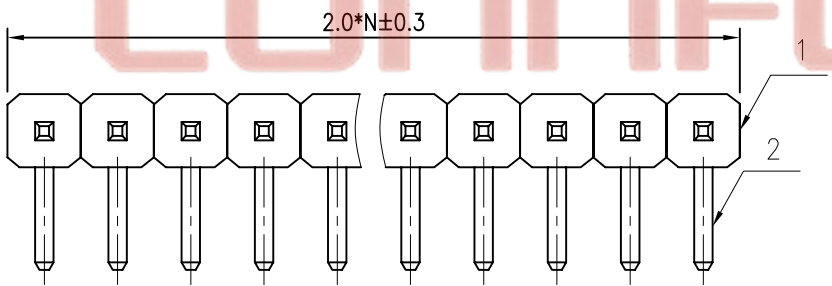

N: NUMBER OF CONTACTS  
A&B&C: CUSTOMER LENGTH AVAILABLE

TABLE A:

TYPE	Dimension			Pin Length
	A	B	C	
1	4.00	2.80	1.00	10.50
2	5.00	2.50	1.00	11.00
3	5.00	4.75	0.75	13.10
4	3.80	3.80	0.75	11.00
5	2.50	2.80	1.30	9.20
6	3.70	3.00	1.75	11.00
7				

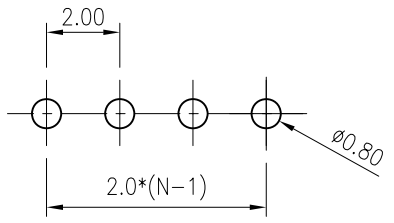

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	SINGLE ROW RIGHT ANGLE	
X.	±0.60	X.	±5'				
.X	±0.38	.X	±3'	mm			
.XX	±0.25	.XX	±2'	A4	SHEET	DS1025-02 SERIES	
2	CONTACT	COPPER ALLOY	GOLD PLATED	DRAWING TYPE		CUSTOMER	
1	HOUSING	THERMOPLASTIC	UL 94 V-0	SCALE	1:1	SHEET	1 OF 1
ITEM	PART NAME	PART NO.	MATERILAS	DRAWING NO.	C-DS1025-02-XXXXX-X		

晨翔电子有限公司  
CONNFly CONNFly ELECTRONIC CO. LTD

Fax:86-574-63510817  
E-mail:sale@zhenqin.com.cn