

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 09/25/06'	~	LJC 09/25/06'
B	整理图面	YCH 05/21/08'	~	


NOTES:

- ELECTRICAL CHARACTERISTICS:
  - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
  - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
  - OPERATING TEMPERATURE: 0°C~+85°C.
  - STORAGE TEMPERATURE: -20°C~+70°C.


3. PRODUCT NUMBER CODE:

DS1077- X X X X X X X

- SCREW DIM. A
  - S: Standard(W/O nut)
  - 1: 5.00
  - 2: 3.00
  - 3: 5.20
  - 4: 4.80
  - 5: 5.80
  - 6: 4.00
- SCREW TYPE
  - S: Standard(W/O nut)
  - 1: CC TYPE
  - 2: CS TYPE
  - 3: BR TYPE
  - 4: BRJ TYPE DIM. DIM C: 3~4
  - 5: BRJ TYPE DIM. DIM C: 5~6
  - 6: BRJ TYPE DIM. DIM C: 3~4 (SCREWS IN BULK PACKAGE)
- SHELL PLATING
  - T:FORNT & BACK SHELL TIN
  - N:FORNT SHELL NICKEL,BACK SHELL TIN
- CONTACT PLATING
  - 8: FULL GOLD FLASH
  - 0: SELECTIVE GOLD FLASH
- HOUSING COLOR
  - B:BLACK
  - W:WHITE
  - U:BLUE
- CONNECTOR TYPE
  - M:MALE
  - F:FEMALE
- No.OF CONTACTS
  - 15 26 44 62 78

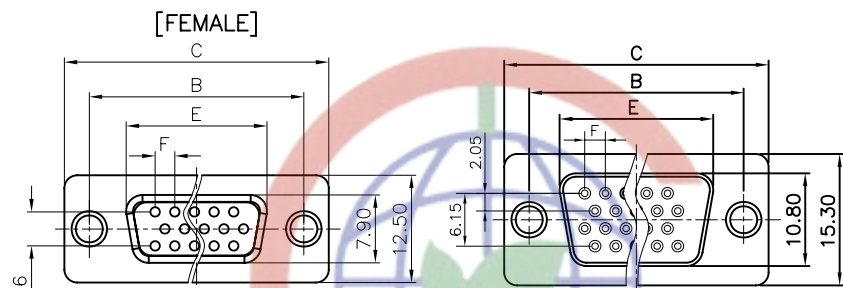

78pin Figure

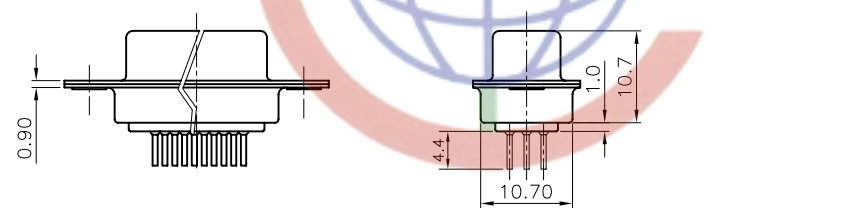


Standard TYPE

CC TYPE


CS TYPE

BR TYPE

BRJ TYPE

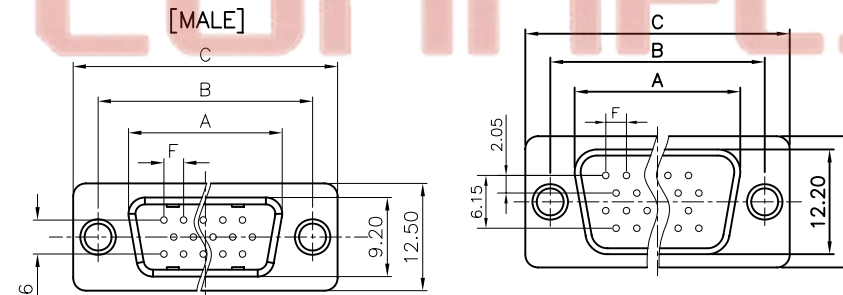

78pin Figure

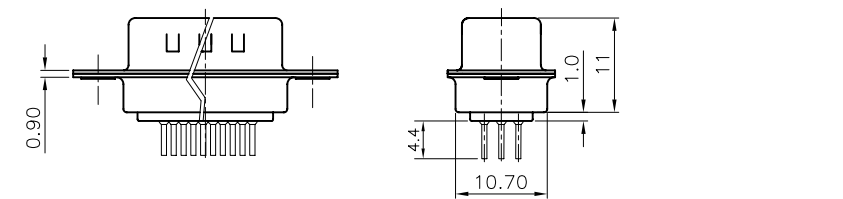

Dimension

Position	A	B	C	E	F
15	17.90	24.99	30.80	16.33	2.29
26	26.50	33.32	39.14	24.66	2.29
44	40.00	47.04	53.04	38.38	2.29
62	56.50	63.50	69.32	54.84	2.41
78	54.30	61.00	67.04	52.34	2.41

GENERAL TOLERANCE	ANGLE TOLERANCE
X. ±0.60	X. ±5°
.X ±0.38	.X ±3°
.XX ±0.25	.XX ±2°

PROJECTION	TITLE
UNITS mm	D-SUB H.DIP STRAIGHT TYPE
SHEET SIZE A4	SERIES DS1077 SERIES

DRAWING TYPE	CUSTOMER
SCALE 1:1	SHEET 1 OF 1
DRAWING NO. C-DS1077-XXXXXXX	


**晨翔电子有限公司**  
**CONNFLY CONNFLY ELECTRONIC CO. LTD**