


### D S C S E R I E S D - S U B H . D . S O L D E R T Y P E


#### Specification:

- 1) Insulator: Thermoplastic (UL94V-0)
- 2) Contact: Copper Alloy, Gold Plated
- 3) Storage Temperature: -20°C ~ 70°C
- 4) Storage Temperature: 0°C ~ 85°C
- 5) Contact Resistance: 20 mW max. (initial)
- 6) Insulation Resistance: 1000 MW min.
- 7) Dielectric Withstanding Voltage: 1000 VAC (1 minute)

#### MALE



Series No.	No. of Contact (N)	A	B	C	D	E
DSC-415	15	30.0	16.9	2.29	25.0	19.3
DSC-426	26	39.1	25.3	2.29	33.3	27.5
DSC-444	44	53.0	39.0	2.29	47.0	41.3
DSC-462	62	69.3	55.4	2.41	63.5	57.7
DSC-478	78	66.9	52.9	2.41	61.1	55.3

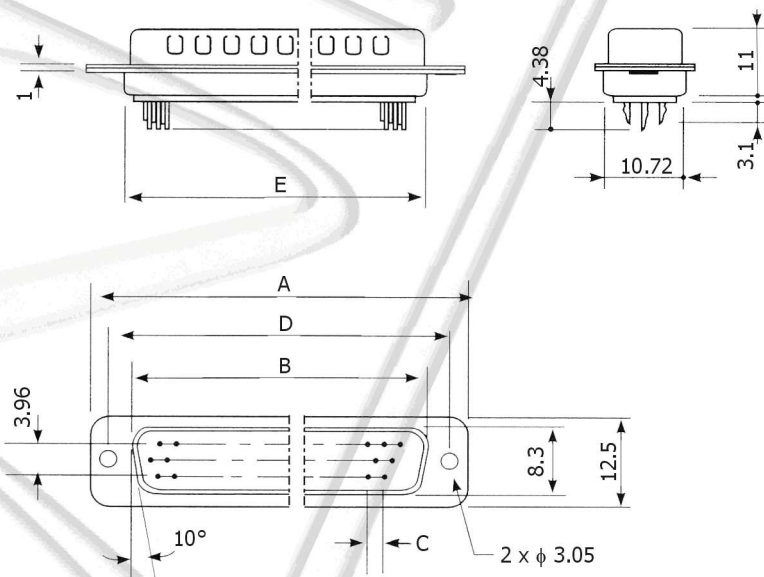

# Ninigi

## FEMALE



Series No.	No. of Contact (N)	A	C	D	E	F
DSC-515	15	30.0	2.29	25.0	19.3	16.3
DSC-526	26	39.1	2.29	33.3	27.5	24.7
DSC-544	44	53.0	2.29	47.0	41.3	38.4
DSC-562	62	69.3	2.41	63.5	57.7	54.8
DSC-578	78	66.9	2.41	61.1	55.3	52.3

