



Encapsulated Transformer

El-42x14.8mm series

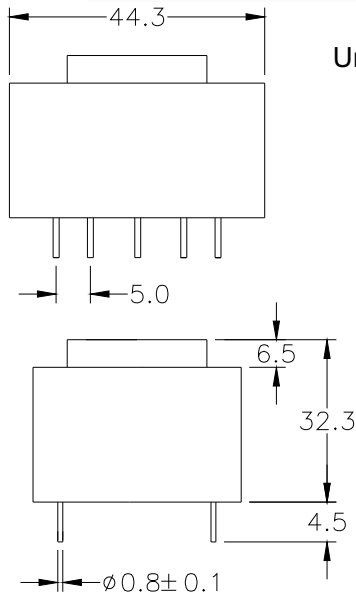


Unit: in mm

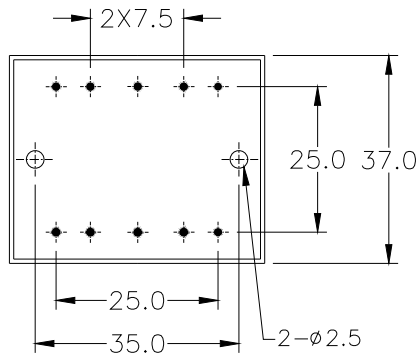


Catalog No	Secondary						Ambient Temp. (Ta)	Approval	
	Rated Voltage	Power Rating	Loading Current	No-Load Voltage	Secondary Circuit	Secondary Fuse		VDE	CE
V42AJ-15AEP7	6.0 V	5.0 VA	833 mA	7.4 V	A	1000 mA	70°C	●	●
V42AJ-15A1P7	6.0 V	8.0 VA	1333 mA	8.4 V	A	1250 mA	70°C	●	●
V42AJ-15A3P7	7.5 V	8.0 VA	1067 mA	10.5 V	A	1250 mA	70°C	●	●
V42AJ-15ADP7	9.0 V	4.5 VA	500 mA	11.0 V	A	500 mA	70°C	●	●
V42AJ-15AFP7	9.0 V	5.0 VA	556 mA	10.9 V	A	630 mA	70°C	●	●
V42AJ-15A4P7	9.0 V	8.0 VA	889 mA	12.6 V	A	1000 mA	70°C	●	●
V42AJ-15ACP7	12.0 V	4.5 VA	375 mA	14.5 V	A	400 mA	70°C	●	●
V42AJ-15ABP7	12.0 V	6.0 VA	500 mA	16.9 V	A	500 mA	70°C	●	●
V42AJ-15A5P7	12.0 V	8.0 VA	667 mA	16.9 V	A	800 mA	70°C	●	●
V42AJ-15AAP7	15.0 V	5.0 VA	333 mA	21.0 V	A	400 mA	70°C	●	●
V42AJ-15A6P7	15.0 V	8.0 VA	533 mA	21.0 V	A	630 mA	70°C	●	●
V42AJ-15A9P7	18.0 V	5.0 VA	278 mA	25.6 V	A	300 mA	70°C	●	●
V42AJ-15A7P7	18.0 V	8.0 VA	444 mA	25.3 V	A	500 mA	70°C	●	●
V42AJ-15A8P7	24.0 V	8.0 VA	333 mA	33.7 V	A	400 mA	70°C	●	●
V42AJ-15A2P7	30.0 V	8.0 VA	267 mA	40.2 V	A	250 mA	70°C	●	●

Catalog No	Secondary						Ambient Temp. (Ta)	Approval	
	Rated Voltage	Power Rating	Loading Current	No-Load Voltage	Secondary Circuit	Secondary Fuse		VDE	CE
V42AJ-15D1P7	6.0 Vx2	8.0 VA	667 mA	8.4 Vx2	D	630 mA	70°C	●	●
V42AJ-15DBP7	7.5 Vx2	5.0 VA	333 mA	9.1 Vx2	D	400 mA	70°C	●	●
V42AJ-15D3P7	7.5 Vx2	8.0 VA	533 mA	10.5 Vx2	D	630 mA	70°C	●	●
V42AJ-15D9P7	9.0 Vx2	5.0 VA	278 mA	12.6 Vx2	D	315 mA	70°C	●	●
V42AJ-15D4P7	9.0 Vx2	8.0 VA	444 mA	12.6 Vx2	D	500 mA	70°C	●	●
V42AJ-15DAP7	12.0 Vx2	5.0 VA	208 mA	14.5 Vx2	D	250 mA	70°C	●	●
V42AJ-15D5P7	12.0 Vx2	8.0 VA	333 mA	16.9 Vx2	D	400 mA	70°C	●	●
V42AJ-15D6P7	15.0 Vx2	8.0 VA	267 mA	21.0 Vx2	D	315 mA	70°C	●	●
V42AJ-15DCP7	18.0 Vx2	5.0 VA	139 mA	23.5 Vx2	D	150 mA	70°C	●	●
V42AJ-15D2P7	18.0 Vx2	8.0 VA	222 mA	24.5 Vx2	D	250 mA	70°C	●	●

Secondary Circuitry: A




Secondary Circuitry: D



Remarks :

1) Catalog Number System :

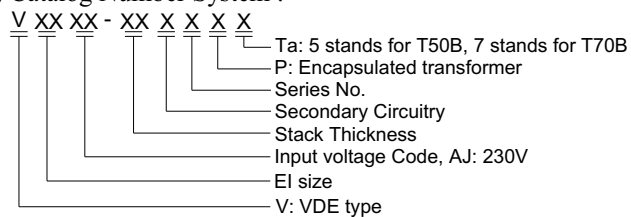

2) Non short-circuit proof safety isolating transformer

3) * - Non short-circuit proof isolating transformer

4) Temperature Class : B

5) Weight per unit : approximate 210gm

6) ● - Approved

7) ○ - Meet Standard