

MULTILAYER CERAMIC CHIP INDUCTORS 積層式陶瓷晶片電感

HBLS series for high frequency

HBLS 系列適用於高頻率產品

Electrical characteristics 電氣特性



Shape(尺寸): 0603(0201)

Part Number 產品料號	Inductance Q 感值 (nH) 品質 公差	Min 品質 係數	Test Frequency (MHz) 測試頻率	Self-resonant DC Frequency (GHz) Min	Resistance (Ω) Max 直流電阻	Rated Current (mA)max 額定電流	Thickness (mm) 厚度	Part Number 產品料號
HBLS0603-1N0S	1.0	±0.3nH	4	100	10	0.14	250	0.33Max
HBLS0603-1N2S	1.2	±0.3nH	4	100	10	0.14	250	0.33Max
HBLS0603-1N5S	1.5	±0.3nH	4	100	10	0.18	230	0.33Max
HBLS0603-1N8S	1.8	±0.3nH	4	100	10	0.19	200	0.33Max
HBLS0603-2N2S	2.2	±0.3nH	4	100	8.8	0.22	200	0.33Max
HBLS0603-2N7S	2.7	±0.3nH	5	100	7.7	0.25	200	0.33Max
HBLS0603-3N3S	3.3	±0.3nH	5	100	6.7	0.30	180	0.33Max
HBLS0603-3N9S	3.9	±0.3nH	5	100	6.0	0.30	170	0.33Max
HBLS0603-4N7S	4.7	±0.3nH	5	100	5.3	0.40	150	0.33Max
HBLS0603-5N1S	5.1	±0.3nH	5	100	4.7	0.40	150	0.33Max
HBLS0603-5N6S	5.6	±0.3nH	5	100	4.2	0.40	150	0.33Max
HBLS0603-6N8J	6.8	±5%	5	100	3.5	0.50	150	0.33Max
HBLS0603-8N2J	8.2	±5%	5	100	3.2	0.55	150	0.33Max
HBLS0603-10NJ	10	±5%	5	100	2.8	0.65	150	0.33Max
HBLS0603-12NJ	12	±5%	5	100	2.4	0.70	100	0.33Max
HBLS0603-15NJ	15	±5%	5	100	2.2	0.80	100	0.33Max
HBLS0603-18NJ	18	±5%	5	100	2.1	0.90	100	0.33Max
HBLS0603-22NJ	22	±5%	5	100	1.8	1.20	100	0.33Max
HBLS0603-27NJ	27	±5%	4	100	1.8	1.80	50	0.33Max
HBLS0603-33NJ	33	±5%	4	100	1.7	2.10	50	0.33Max
HBLS0603-39NJ	39	±5%	4	100	1.5	2.40	50	0.33Max

* TEST EQUIPMENT: E4991A IMPEDANCE ANALYZER

量測儀器 : E4991A 阻抗分析儀

*Tolerance: S=±0.3nH , J=±5%, K=±10%

* Max Echo reserves the rights for revising the content of this catalog without further notification.

鈺鎧保留更改此目錄中任何內容之權利，而不再另行通知。

MULTILAYER CERAMIC CHIP INDUCTORS 積層式陶瓷晶片電感

HBLS series for high frequency

HBLS 系列適用於高頻率產品

Electrical characteristics 電氣特性



Shape(尺寸): 1005(0402)

Part Number 產品料號	Inductance 感值 (nH) Tolerance 公差	Q Min 品質 係數	Test Frequency (MHz) 測試頻率	Self-resonant Frequency (GHz) Min 共振頻率	DC Resistance (Ω) Max 直流電阻	Rated Current (mA) Max 額定電流	Thickness (mm) 厚度
HBLS1005-1N0S	1.0±0.3nH	8	100	10	0.08	300	0.5±0.05
HBLS1005-1N2S	1.2±0.3nH	8	100	10	0.09	300	0.5±0.05
HBLS1005-1N5S	1.5±0.3nH	8	100	6	0.10	300	0.5±0.05
HBLS1005-1N8S	1.8±0.3nH	8	100	6	0.12	300	0.5±0.05
HBLS1005-2N0S	2.0±0.3nH	8	100	6	0.12	300	0.5±0.05
HBLS1005-2N2S	2.2±0.3nH	8	100	6	0.13	300	0.5±0.05
HBLS1005-2N4S	2.4±0.3nH	8	100	6	0.13	300	0.5±0.05
HBLS1005-2N7S	2.7±0.3nH	8	100	6	0.13	300	0.5±0.05
HBLS1005-3N0S	3.0±0.3nH	8	100	6	0.16	300	0.5±0.05
HBLS1005-3N3S	3.3±0.3nH	8	100	6	0.16	300	0.5±0.05
HBLS1005-3N9S	3.9±0.3nH	8	100	4	0.21	300	0.5±0.05
HBLS1005-4N7S	4.7±0.3nH	8	100	4	0.21	300	0.5±0.05
HBLS1005-5N6S	5.6±0.3nH	8	100	4	0.23	300	0.5±0.05
HBLS1005-6N8J	6.8±5%	8	100	3.9	0.25	300	0.5±0.05
HBLS1005-8N2J	8.2±5%	8	100	3.6	0.28	300	0.5±0.05
HBLS1005-10NJ	10±5%	8	100	3.2	0.31	300	0.5±0.05
HBLS1005-12NJ	12±5%	8	100	2.7	0.40	300	0.5±0.05
HBLS1005-15NJ	15±5%	8	100	2.3	0.46	300	0.5±0.05
HBLS1005-18NJ	18±5%	8	100	2.1	0.55	300	0.5±0.05
HBLS1005-22NJ	22±5%	8	100	1.9	0.60	300	0.5±0.05
HBLS1005-27NJ	27±5%	8	100	1.6	0.70	300	0.5±0.05
HBLS1005-33NJ	33±5%	8	100	1.3	0.80	200	0.5±0.05
HBLS1005-39NJ	39±5%	8	100	1.2	0.90	200	0.5±0.05
HBLS1005-47NJ	47±5%	8	100	1.0	1.00	200	0.5±0.05
HBLS1005-56NJ	56±5%	8	100	0.75	1.00	200	0.5±0.05
HBLS1005-68NJ	68±5%	8	100	0.75	1.20	180	0.5±0.05
HBLS1005-82NJ	82±5%	8	100	0.60	1.30	150	0.5±0.05
HBLS1005-R10J	100±5%	8	100	0.60	1.50	150	0.5±0.05
HBLS1005-R12J	120±5%	8	100	0.60	1.60	150	0.5±0.05

* TEST EQUIPMENT: E4991A IMPEDANCE ANALYZER

量測儀器 : E4991A 阻抗分析儀

* Max Echo reserves the rights for revising the content of this catalog without further notification.
鈺鎧保留更改此目錄中任何內容之權利，而不再另行通知。

MULTILAYER CERAMIC CHIP INDUCTORS 積層式陶瓷晶片電感

HBLS series for high frequency

HBLS 系列適用於高頻率產品

Electrical characteristics 電氣特性



Shape(尺寸): 1608(0603)

Part Number 產品料號	Inductance 感值 (nH) Tolerance 公差	Q Min 品質 係數	Test Frequency (MHz) 測試頻率	Self-resonant Frequency (GHz) Min 共振頻率	DC Resistance (Ω) Max 直流電阻	Rated Current (mA) Max 額定電流	Thickness (mm) 厚度
HBLS1608-1N0S	1.0±0.3nH	8	100	10	0.05	300	0.8±0.15
HBLS1608-1N2S	1.2±0.3nH	8	100	10	0.05	300	0.8±0.15
HBLS1608-1N5S	1.5±0.3nH	8	100	6.0	0.10	300	0.8±0.15
HBLS1608-1N8S	1.8±0.3nH	8	100	6.0	0.10	300	0.8±0.15
HBLS1608-2N2S	2.2±0.3nH	8	100	6.0	0.10	300	0.8±0.15
HBLS1608-2N7S	2.7±0.3nH	10	100	6.0	0.10	300	0.8±0.15
HBLS1608-3N3S	3.3±0.3nH	10	100	6.0	0.12	300	0.8±0.15
HBLS1608-3N9S	3.9±0.3nH	10	100	6.0	0.14	300	0.8±0.15
HBLS1608-4N7S	4.7±0.3nH	10	100	4.0	0.16	300	0.8±0.15
HBLS1608-5N6S	5.6±0.3nH	10	100	4.0	0.18	300	0.8±0.15
HBLS1608-6N8J	6.8±5%	10	100	4.0	0.22	300	0.8±0.15
HBLS1608-8N2J	8.2±5%	10	100	3.5	0.24	300	0.8±0.15
HBLS1608-10NJ	10±5%	12	100	3.4	0.26	300	0.8±0.15
HBLS1608-12NJ	12±5%	12	100	2.6	0.28	300	0.8±0.15
HBLS1608-15NJ	15±5%	12	100	2.3	0.32	300	0.8±0.15
HBLS1608-18NJ	18±5%	12	100	2.0	0.35	300	0.8±0.15
HBLS1608-22NJ	22±5%	12	100	1.6	0.40	300	0.8±0.15
HBLS1608-27NJ	27±5%	12	100	1.4	0.45	300	0.8±0.15
HBLS1608-33NJ	33±5%	12	100	1.2	0.55	300	0.8±0.15
HBLS1608-39NJ	39±5%	12	100	1.1	0.60	300	0.8±0.15
HBLS1608-47NJ	47±5%	12	100	0.9	0.70	300	0.8±0.15
HBLS1608-56NJ	56±5%	12	100	0.9	0.75	300	0.8±0.15
HBLS1608-68NJ	68±5%	12	100	0.7	0.85	300	0.8±0.15
HBLS1608-82NJ	82±5%	12	100	0.6	0.95	300	0.8±0.15
HBLS1608-R10J	100±5%	12	100	0.6	1.00	300	0.8±0.15
HBLS1608-R12J	120±5%	8	50	0.5	1.20	300	0.8±0.15
HBLS1608-R15J	150±5%	8	50	0.5	1.20	300	0.8±0.15
HBLS1608-R18J	180±5%	8	50	0.4	1.30	300	0.8±0.15
HBLS1608-R22J	220±5%	8	50	0.4	1.50	300	0.8±0.15

* TEST EQUIPMENT: E4991A IMPEDANCE ANALYZER

量測儀器：E4991A 阻抗分析儀

* Max Echo reserves the rights for revising the content of this catalog without further notification.

鈺鎧保留更改此目錄中任何內容之權利，而不再另行通知。

MULTILAYER CERAMIC CHIP INDUCTORS 積層式陶瓷晶片電感

HBSL series for high frequency

HBSL 系列適用於高頻率產品

Electrical characteristics 電氣特性



Shape(尺寸): 2012(0805)

Part Number 產品料號	Inductance 感值 (nH) Tolerance 公差	Q Min 品質 係數	Test Frequency (MHz) 測試頻率	Self-resonant Frequency (GHz) Min 共振頻率	DC Resistance (Ω) Max 直流電阻	Rated Current (mA) Max 額定電流	Thickness (mm) 厚度
HBLS2012-1N0S	1.0±0.3nH	10	100	10	0.10	300	0.85±0.2
HBLS2012-1N2S	1.2±0.3nH	10	100	10	0.10	300	0.85±0.2
HBLS2012-1N5S	1.5±0.3nH	10	100	4.0	0.10	300	0.85±0.2
HBLS2012-1N8S	1.8±0.3nH	10	100	4.0	0.10	300	0.85±0.2
HBLS2012-2N2S	2.2±0.3nH	10	100	4.0	0.10	300	0.85±0.2
HBLS2012-2N7S	2.7±0.3nH	12	100	4.0	0.10	300	0.85±0.2
HBLS2012-3N3S	3.3±0.3nH	12	100	4.0	0.13	300	0.85±0.2
HBLS2012-3N9S	3.9±0.3nH	12	100	4.0	0.15	300	0.85±0.2
HBLS2012-4N7S	4.7±0.3nH	12	100	3.5	0.20	300	0.85±0.2
HBLS2012-5N6S	5.6±0.3nH	15	100	3.2	0.23	300	0.85±0.2
HBLS2012-6N8J	6.8±5%	15	100	2.8	0.25	300	0.85±0.2
HBLS2012-8N2J	8.2±5%	15	100	2.4	0.28	300	0.85±0.2
HBLS2012-10NJ	10±5%	15	100	2.1	0.30	300	0.85±0.2
HBLS2012-12NJ	12±5%	15	100	1.9	0.35	300	0.85±0.2
HBLS2012-15NJ	15±5%	15	100	1.6	0.40	300	0.85±0.2
HBLS2012-18NJ	18±5%	15	100	1.5	0.45	300	0.85±0.2
HBLS2012-22NJ	22±5%	18	100	1.4	0.50	300	0.85±0.2
HBLS2012-27NJ	27±5%	18	100	1.3	0.55	300	0.85±0.2
HBLS2012-33NJ	33±5%	18	100	1.2	0.60	300	0.85±0.2
HBLS2012-39NJ	39±5%	18	100	1.0	0.65	300	0.85±0.2
HBLS2012-47NJ	47±5%	18	100	0.9	0.70	300	0.85±0.2
HBLS2012-56NJ	56±5%	18	100	0.8	0.75	300	0.85±0.2
HBLS2012-68NJ	68±5%	18	100	0.7	0.80	300	0.85±0.2
HBLS2012-82NJ	82±5%	18	100	0.6	0.90	300	0.85±0.2
HBLS2012-R10J	100±5%	18	100	0.6	0.90	300	0.85±0.2
HBLS2012-R12J	120±5%	13	50	0.5	0.95	300	0.85±0.2
HBLS2012-R15J	150±5%	13	50	0.5	1.00	300	1.25±0.2
HBLS2012-R18J	180±5%	13	50	0.4	1.10	300	1.25±0.2
HBLS2012-R22J	220±5%	12	50	0.35	1.20	300	1.25±0.2
HBLS2012-R27J	270±5%	12	50	0.3	1.30	300	1.25±0.2
HBLS2012-R33J	330±5%	12	50	0.25	1.40	300	1.25±0.2
HBLS2012-R39J	390±5%	10	50	0.25	1.40	300	1.25±0.2
HBLS2012-R47J RDC4.0	470±5%	10	50	0.20	4.00	200	1.25±0.2
HBLS2012-R56J	560±5%	10	25	0.18	5.00	50	1.25±0.2
HBLS2012-R68J	680±5%	10	25	0.16	5.50	50	1.25±0.2

* TEST EQUIPMENT: E4991A IMPEDANCE ANALYZER 量測儀器 : E4991A 阻抗分析儀

* Max Echo reserves the rights for revising the content of this catalog without further notification.
鈺鎧保留更改此目錄中任何內容之權利，而不再另行通知。

MULTILAYER CERAMIC CHIP INDUCTORS 積層式陶瓷晶片電感

HBSL series for high frequency
Electrical characteristics 電氣特性

HBSL 系列適用於高頻率產品





Shape(尺寸): 0603(0201)

Shape(尺寸): 1005(0402)



INDUCTANCE vs. FREQUENCY

INDUCTANCE vs. FREQUENCY

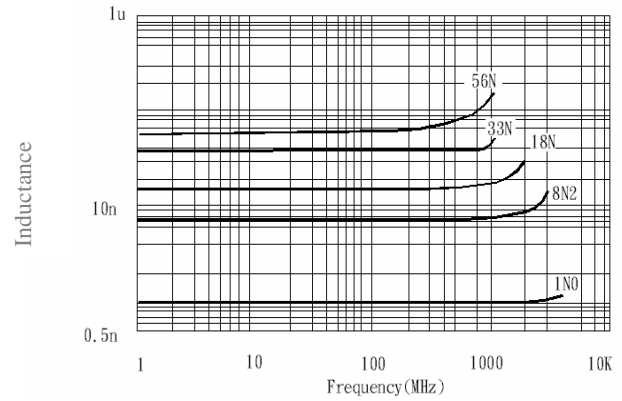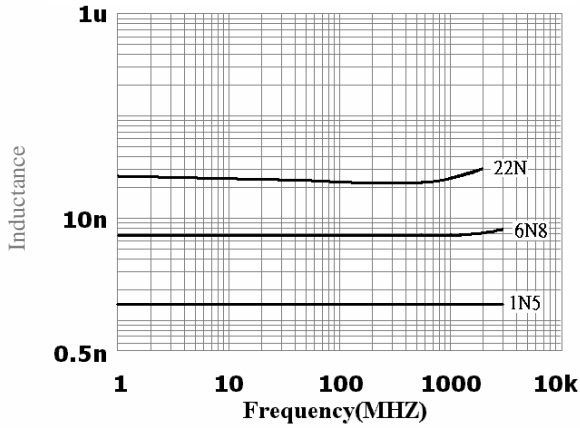



Q vs. FREQUENCY

Q vs. FREQUENCY

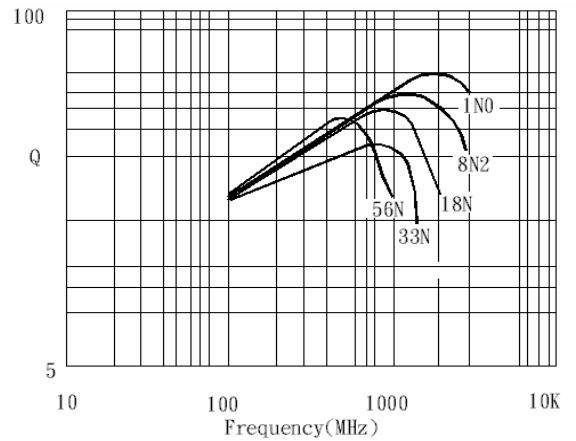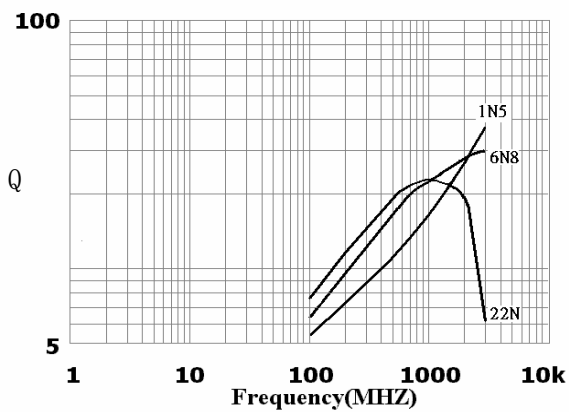

IMPEDANCE vs. FREQUENCY

IMPEDANCE vs. FREQUENCY

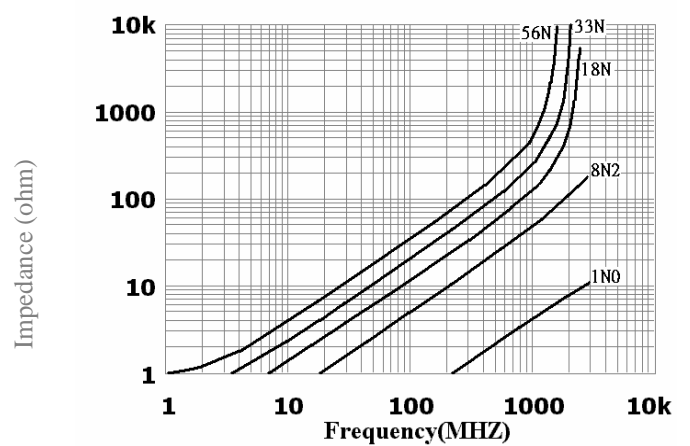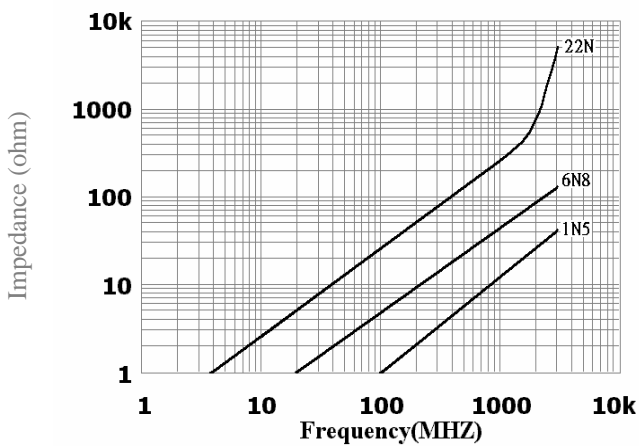

* Max Echo reserves the rights for revising the content of this catalog without further notification.
鈺鎧保留更改此目錄中任何內容之權利，而不再另行通知。

MULTILAYER CERAMIC CHIP INDUCTORS 積層式陶瓷晶片電感

HBSL series for high frequency

HBSL 列適用於高頻率產品


Electrical characteristics 電氣特性




Shape(尺寸): 1608(0603)

Shape(尺寸): 2012(0805)


INDUCTANCE vs. FREQUENCY

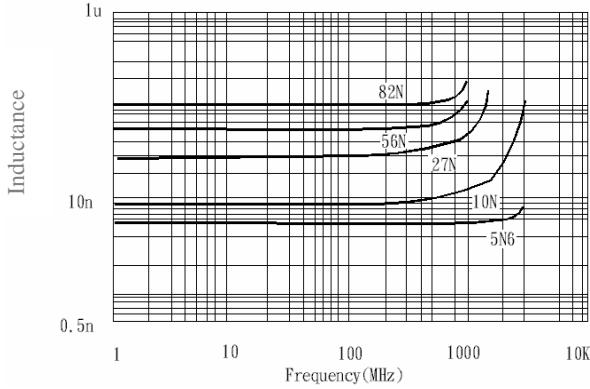


INDUCTANCE vs. FREQUENCY

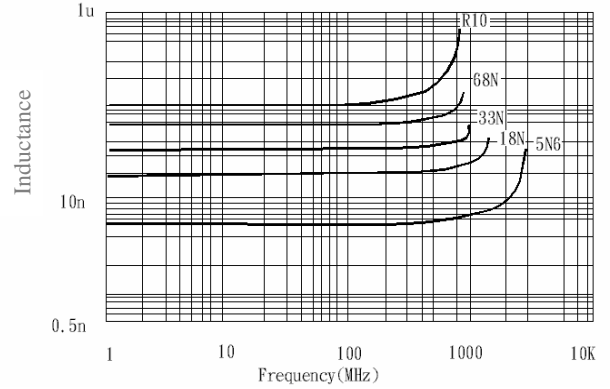


Q vs. FREQUENCY

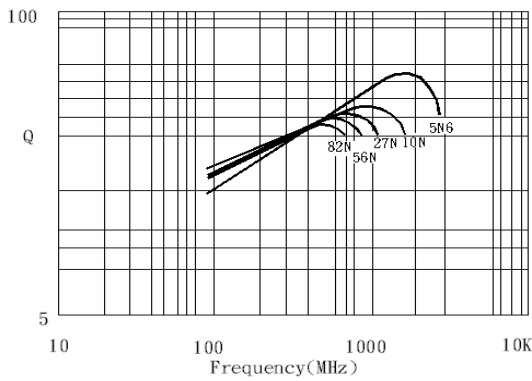


Q vs. FREQUENCY

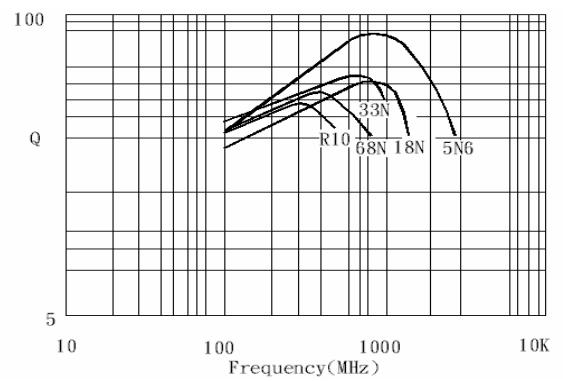

IMPEDANCE vs. FREQUENCY

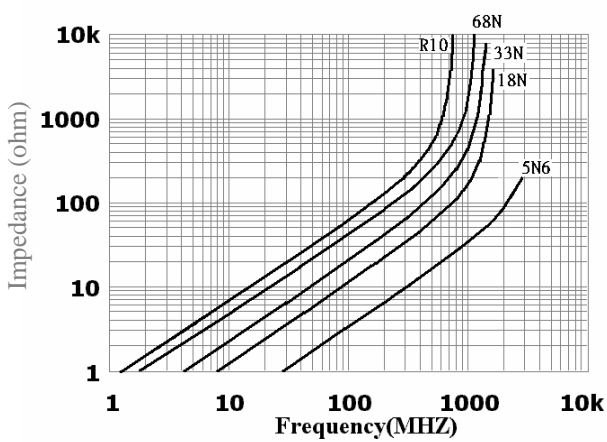

IMPEDANCE vs. FREQUENCY

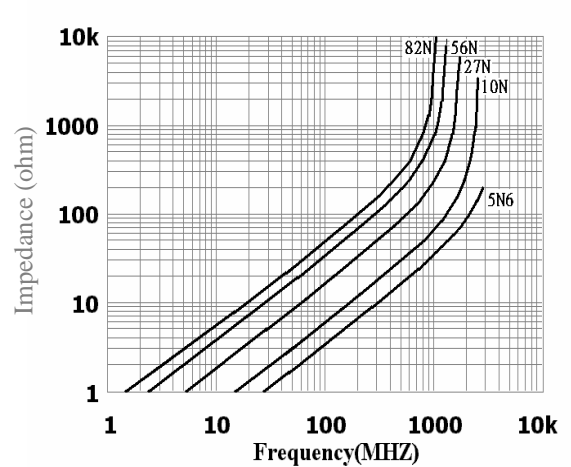

* Max Echo reserves the rights for revising the content of this catalog without further notification.
 鈺鎧保留更改此目錄中任何內容之權利，而不再另行通知。