



IC'S DIL STANDARD SOCKETS 1.778 MM (0.070")

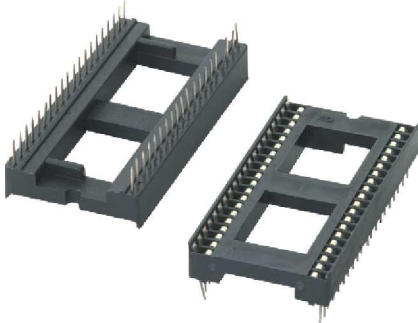

Specification:

- 1) Insulator: Thermoplastic (UL94V-0)
- 2) Contact: Copper Alloy
- 3) Storage Temperature: -20°C ~ 85°C
- 4) Operating Temperature: 0°C ~ 70°C
- 5) Contact Resistance: 20 mW max. (initial)
- 6) Insulation Resistance: 1000 MW min.
- 7) Dielectric Withstanding Voltage: 1000 VAC (1 minute)

ICVT 30P-S



Pitch 1.778 mm (0.070")

Contact Plating:



P - 100m" Phosphor Bronze

No. of Contacts:

N = 24; 28; 30; 40; 42; 48; 52; 56; 64

IC's DIL Standard Sockets

No. of Contact (N)	A	B	C	D
24	21.30	19.56	12.65	10.16
28	25.17	23.11	12.65	10.16
30	26.60	24.89	12.65	10.16
40	35.84	33.78	17.73	15.24
42	37.30	35.56	17.73	15.24
48	42.95	40.89	17.73	15.24
52	46.51	44.45	17.73	15.24
56	49.78	48.01	17.73	15.24
64	57.00	55.12	21.54	19.05

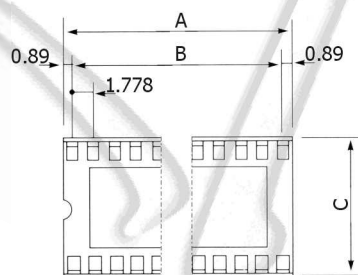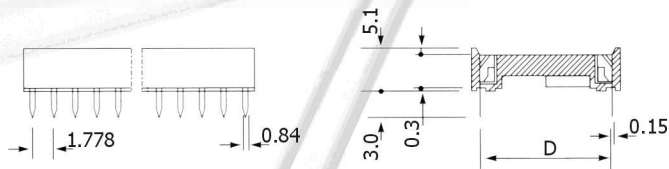

All dimensions in mm.