





MBRB2040RG THRU MBRB20200RG

20.0 AMPS. Isolated Schottky Barrier Rectifiers

PIN Connection TO-263

Features

- Metal silicon junction, majority carrier conduction
- Plastic material used carries Underwriters Laboratory Classifications 94V-0
- High surge capability
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- Guardring for overvoltage protection
- High temperature soldering guaranteed: 260°C/10 seconds, at terminals
- Green compound with suffix "G" on packing code & prefix "G" on datecode.

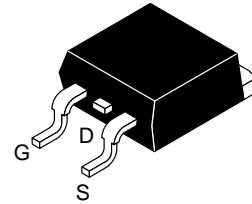

Mechanical Data

- Case: TO-263 molded plastic body
- Polarity: As marked
- Terminals: Pure tin plated, lead free, solderable per MIL-STD-750, Method 2026
- Mounting position: Any
- Weight: 1.7grams
- Mounting torque: 5 in. - lbs. max



Marking Diagram

Y = Year
 A = Assembly Location
 WW = Work Week
 MBRB20XXR = Specific Device Code

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

Type Number	Symbol	MBRB	MBRB	MBRB	MBRB	MBRB	MBRB	MBRB	MBRB	MBRB	Unit
		2040 RG	2045 RG	2050 RG	2060 RG	2080 RG	2090 RG	20100 RG	20150 RG	20200 RG	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	40	45	50	60	80	90	100	150	200	V
Maximum RMS Voltage	V_{RMS}	28	31	35	42	56	63	70	105	140	V
Maximum DC Blocking Voltage	V_{DC}	40	45	50	60	80	90	100	150	200	V
Maximum Average Forward Rectified Current at $T_c=135^\circ\text{C}$	$I_{F(AV)}$	20									A
Peak Repetitive Forward Current (Rated VR, Square Wave, 20KHz) at $T_c=135^\circ\text{C}$	I_{FRM}	20									A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	150									A
Peak Repetitive Reverse Surge Current (Note 1)	I_{RRM}	1			0.5						A
Maximum Instantaneous Forward Voltage (Note 2) $I_F=10\text{A}, T_A=25^\circ\text{C}$ $I_F=10\text{A}, T_A=125^\circ\text{C}$ $I_F=20\text{A}, T_A=25^\circ\text{C}$ $I_F=20\text{A}, T_A=125^\circ\text{C}$	V_F	0.70		0.74	0.76	0.80	0.85				V
Maximum Reverse Current @ Rated VR $T_A=25^\circ\text{C}$ $T_A=125^\circ\text{C}$	I_R	0.02		0.01	0.002	0.0045	0.0002				mA
Voltage Rate of Change (Rated V_R)	dV/dt	10,000									V/us
Typical Junction Capacitance	C_j	400			320						pF
RMS Isolation Voltage (MBRF Type Only) from Terminals to Heatsink with $t=1.0$ Second, $RH \leq 30\%$	V_{ISO}	4500(Note 3) 3500(Note 4) 1500(Note 5)									V
Typical Thermal Resistance Per Leg	$R_{\theta JC}$	1.0			2.0						$^\circ\text{C/W}$
Operating Temperature Range	T_J	- 65 to + 175									$^\circ\text{C}$
Storage Temperature Range	T_{STG}	- 65 to + 175									$^\circ\text{C}$

Note 1: 2.0uS Pulse Width, $f=1.0\text{KHz}$

Note 2: Pulse Test : 300uS Pulse Width, 1% Duty Cycle

Note 3: Clip Mounting (on case), where lead does not overlap heatsink with 0.11" offset

Note 4: Clip Mounting (on case), where lead does not overlap heatsink

Note 5: Screw Mounting screw, where diameter is $\leq 4.9\text{mm}(0.19")$

RATINGS AND CHARACTERISTIC CURVES

FIG. 1 FORWARD CURRENT DERATING CURVE

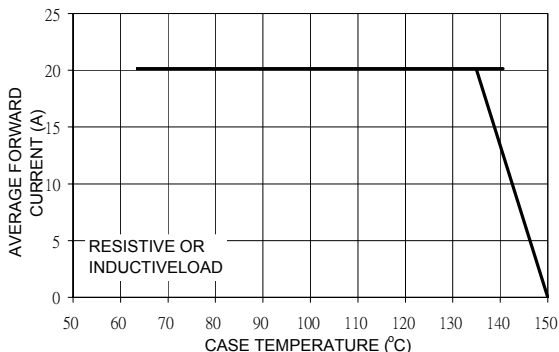


FIG. 2 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

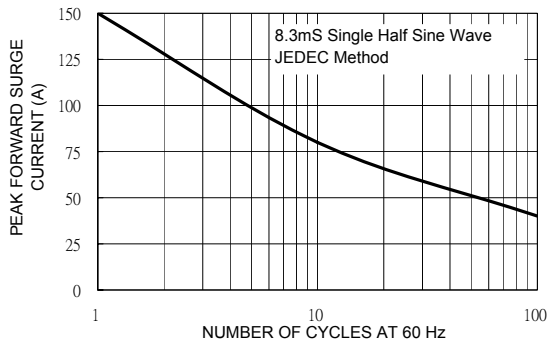


FIG. 3 TYPICAL FORWARD CHARACTERISTICS PER LEG

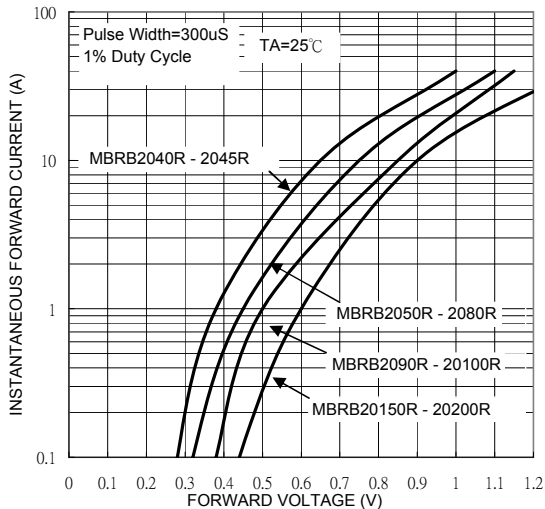


FIG. 4 TYPICAL REVERSE CHARACTERISTICS PER LEG

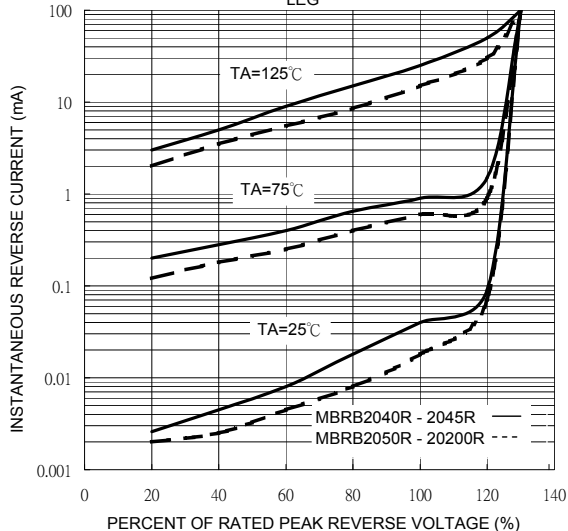


FIG. 5 TYPICAL JUNCTION CAPACITANCE PER LEG



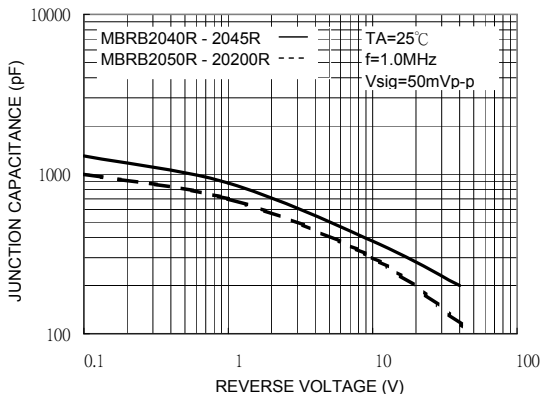


FIG. 6 TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

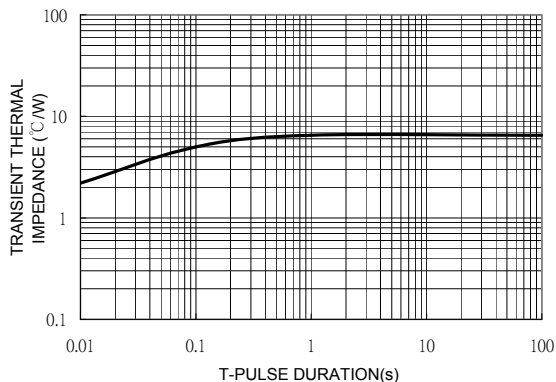

Package Dimensions

TO-263

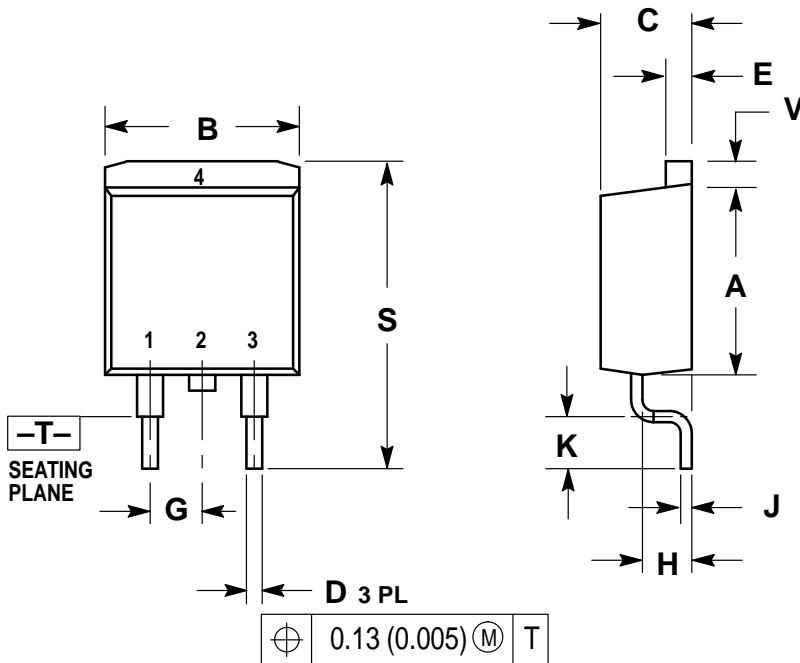

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.340	0.380	8.64	9.65
B	0.380	0.405	9.65	10.29
C	0.160	0.190	4.06	4.83
D	0.020	0.035	0.51	0.89
E	0.045	0.055	1.14	1.40
G	0.100 BSC		2.54 BSC	
H	0.080	0.110	2.03	2.79
J	0.018	0.025	0.46	0.64
K	0.090	0.110	2.29	2.79
S	0.575	0.625	14.60	15.88
V	0.045	0.055	1.14	1.40

STYLE 3:

- PIN 1. ANODE
- 2. CATHODE
- 3. ANODE
- 4. CATHODE