
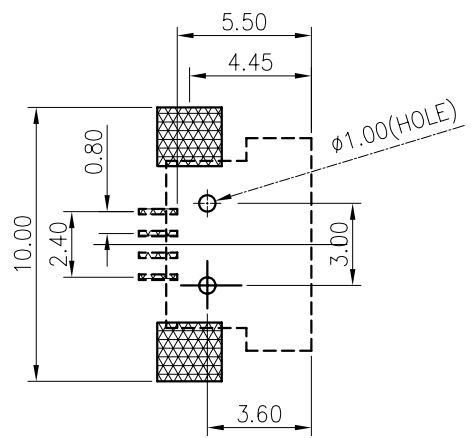
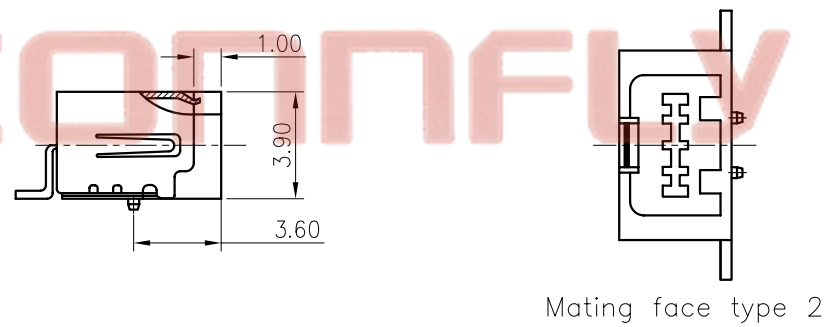


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/10/05'		

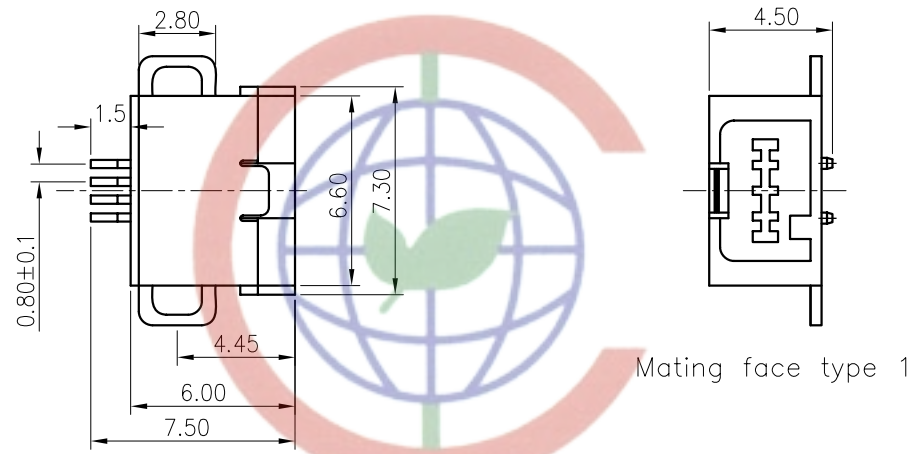


NOTES:

- SPECIFICATIONS
  - .CURRENT RATING: 0.5A/pin Max.
  - .VOLTAGE RATING: 30V(DC)
  - .DIELECTRIC WITHSTANDING VOLTAGE: 100VAC 1 minute.
  - .CONTACT RESISTANCE: 50mΩ Max.
  - .INSULATION RESISTANCE: 100MΩ Min.
  - .TEMPERATURE RANGE: -20°C-+70°C

2.MATERIALS

- .HOUSING: High temperature plastic.
- .SHELL: Copper alloy.
- .CONTACT: Copper alloy.

3.PRODUCT NUMBER CODE:

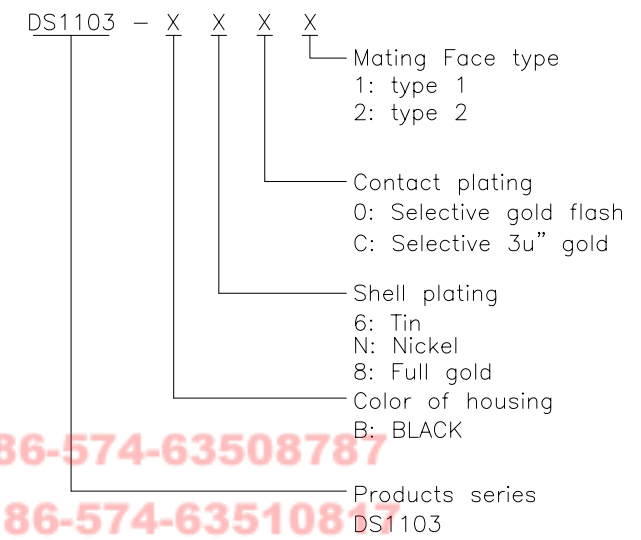

Tel: 86-574-63508787  
 Fax: 86-574-6351087

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	MINI USB 4PIN SMT Female SINGLE TYPE
X.	±0.60	X.	±5°	UNITS	mm		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1103
.XX	±0.25	.XX	±2°	<b>晨翔电子有限公司</b> <b>CONNFLY ELECTRONIC CO. LTD</b>			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		C-DS1103-XXXX					