

Switch

Standard Vertical Push Switch Series

7.0X7.0 Standard Vertical Push Switch Series

ELECTRICAL

Rating :DC30V 0.1A

Insulation Resistance :>100MΩ DC125V

Withstand Voltage :AC 125V 1 minute

Contact Resistance :<100mΩ

Soldering Temper :250°C max.3sec




Mechanical Life :100,000 cycles

Electrical Life :10,000 cycles


Ambient Temper.Used :-25°C to +65°C

Ambient Humidity Used :<85% RH


Operating force :150±80 gf

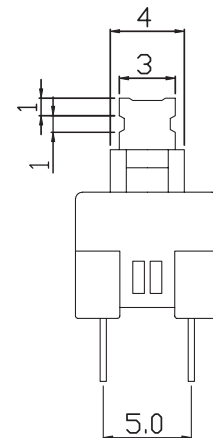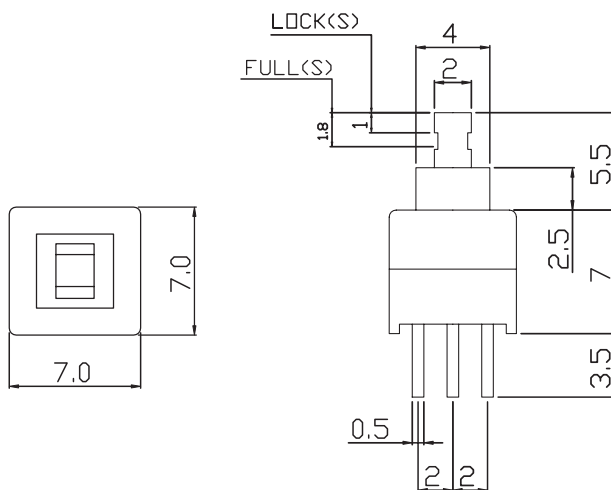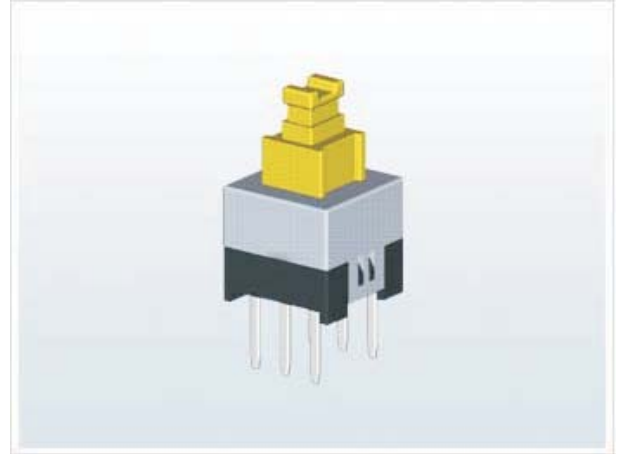

FREE



PUSH



SCHEMATIC

